




## Technical data

Voltage	220-240 VAC 50/60 Hz
System effect	7.5W, 12W, 18W, 24W
Light source	LED <span style="border: 1px solid black; padding: 2px;">D</span>
Colour temperature	3000 / 4000 Kelvin CCT switch
Colour rendering	CRI>90
Expected lifespan	50,000 hours L80B10
Dimmable, how	Yes, trailing edge
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
Beam angle	110°
Cut out	Ø105 mm, Ø155-160 mm, Ø205-210 mm, Ø285 mm
Installation height / headroom above ceiling	22 mm / 26 mm
Exterior dimension	Ø120 mm, Ø170 mm, Ø224 mm, Ø300 mm
Dimension driver	<b>7.5W:</b> L: 71 mm, B: 44,5 mm, H: 26 mm <b>12W og 18W:</b> L: 82 mm, B: 44,5 mm, H: 26 mm <b>24W:</b> L: 95 mm, B: 46 mm, H: 34 mm
Dimension connector box	L: 62.5 mm, W: 44 mm, H: 26 mm
Possibility of through wiring	Yes, 2 x 3G1.5 mm <sup>2</sup>
IP rating, front / back	IP44 / IP20
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoor and outdoor
Warranty	5 years
Approvals	CE

## Product information

- Approved for installation directly in insulation and flammable materials
- Dimmable
- High colour rendering index – CRI>90
- High lumen output
- Flicker free according to the latest Ecodesign / ErP directive
- CCT switch 3000K / 4000K
- 3-pole levers in the connector box
- Quick and easy mounting with springs
- For indoor and outdoor use

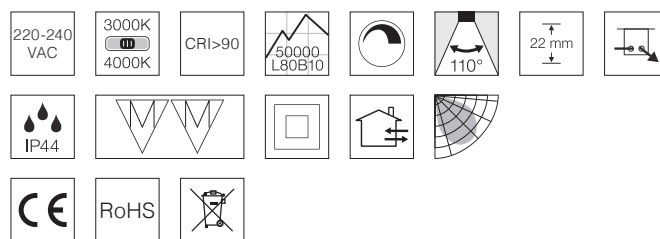

### Lucette G2 8W



### Lucette G2 12W







### Lucette G2 18W



### Lucette G2 24W



NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

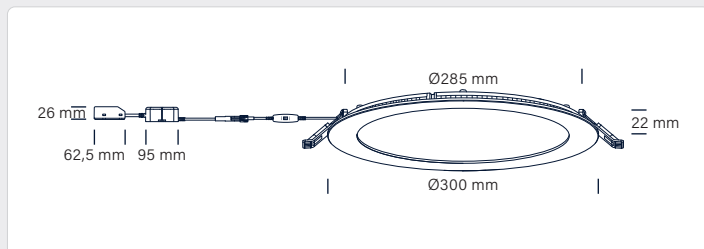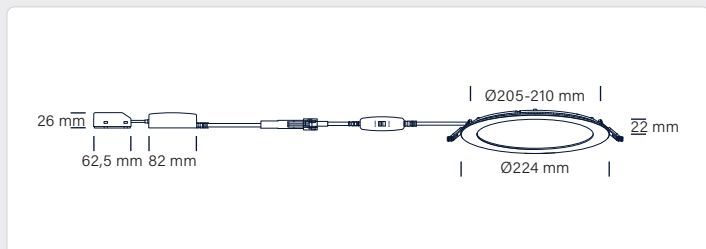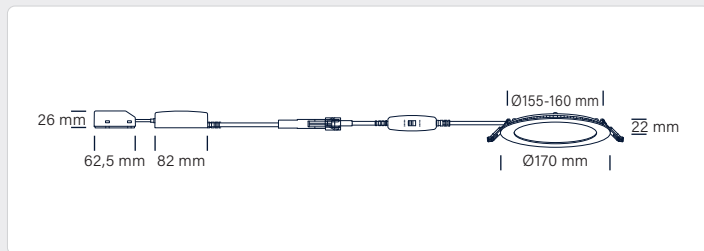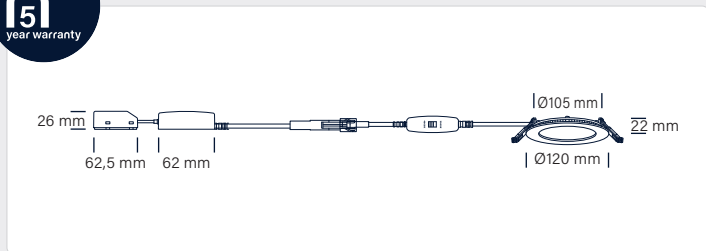

## Lucette G2

Item no.	EAN no.	System effect	Type	Cut out	Exterior dimension
38101013	5704629004931	7.5W	3000 / 4000K   500 / 550lm	Ø105 mm	Ø120 mm
38201013	5704629004948	12W	3000 / 4000K   1000 / 1100lm	Ø155-160 mm	Ø170 mm
38301013	5704629004955	18W	3000 / 4000K   1500 / 1600lm	Ø205-210 mm	Ø224 mm
38401013	5704629004962	24W	3000 / 4000K   2000 / 2100lm	Ø285 mm	Ø300 mm