


## Quick Install High excl. light source


### Technical data

<b>Voltage</b>	220-240 VAC 50 Hz
<b>Light source</b>	Max. 7.5W LED Max. 80 mm high
<b>Carving dimensions</b>	Ø75 mm
<b>Installation height</b>	96 mm
<b>Exterior dimensions</b>	Ø87 mm
<b>Dimensions connector box</b>	L: 85 mm, W: 55 mm, H: 30 mm
<b>Tilt angle</b>	30°
<b>Possibility of through wiring</b>	Yes, 5G1.5
<b>IP-class</b>	IP44 (depends on the light source)
<b>Insulation class</b>	Class II
<b>Material</b>	Aluminium, plastic
<b>Environment</b>	Indoors
<b>Warranty</b>	2 years
<b>Approvals</b>	CE

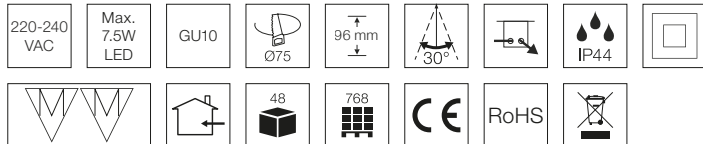

### Product information

- Approved for installation directly in the insulation and flammable materials
- Fits smart bulbs
- Quick and easy mounting
- Mounting with screws
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Sealing ring included, in case of a vapour barrier penetration
- Adjustable screws for ceiling thickness up to 55 mm

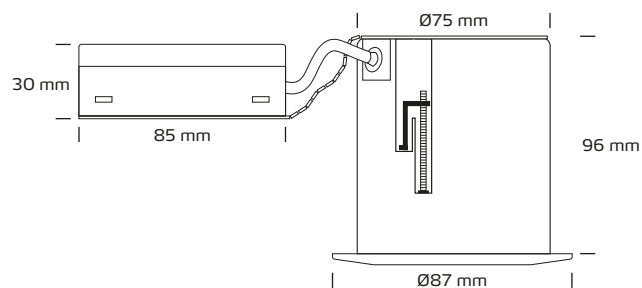

\*The drawing is not drawn to scale

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
1212	5704629012127	Brushed alu	Round
1215	5704629012158	Matt white	Round
1219	5704629012196	Matt black	Round