


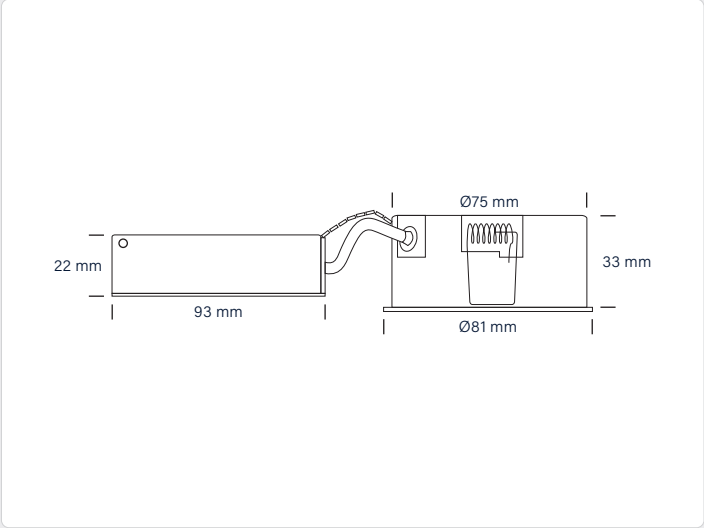


Technical data

Voltage	220-240 VAC 50 Hz
Secondary amperage	350mA
Min. load	3.5W
Max. load	4.9W
Socket	G4
Dimmable	Yes, trailing edge
Cut out dimension	Ø75 mm
Installation height	33 mm
Exterior dimensions	Ø81 mm
Dimensions driver	L: 93 mm, W: 45 mm, H: 22 mm
Possibility of through wiring	Yes, 2 x 3G1.5 mm ² - 30 pcs.
IP rating	IP20
Insulation class	Class II / SELV
Fuse	Built-in thermal fuse with auto reset
Material	Plastic
Environment	Indoors and outdoors
Warranty	2 years
Approvals	CE

Product information

- May only be used with Nordtronic light source
- Low mounting depth
- Quick and easy mounting
- Mounting with springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube

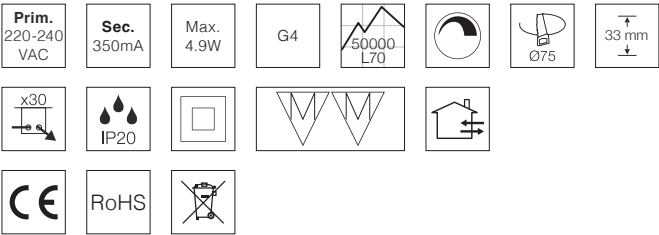

Item no.	EAN no.	Type
1700	5704629017009	Low Profile 6W

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.