

## LED Driver - not dimmable, 2-20W


### Technical data

Primary voltage	220-240VAC
Secondary amperage	350mA
Min. load	2W
Max. load	20W
Efficiency	+85%
Fuse	Built-in thermal fuse with auto reset
Distribution box on secondary side	Yes, with 6 outputs
Cable from the secondary side	Yes, 15 cm to distribution box
Connection cable on primary side	Yes, 2 m cable equipped with 2P plug
Possibility of attachment	Yes, using two screws (not included)
Dimensions driver	L: 128 mm, B: 50 mm, H: 13 mm
Dimensions distribution box	L: 58 mm, B: 37 mm, H: 10 mm
IP-class	IP20
Insulation class	Class II
Material	Plastic
Warranty	2 years
Approvals	CE



### Product information

- LED drivers for mini downlights, 6 outputs
- Built-in thermofuse with auto reset
- Quick and easy installation
- Can be fastened by screws
- **Do NOT plug in any LED lamps, when connected to power**

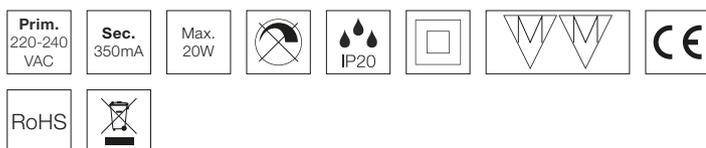

Item no.	EAN no.	Colour	Type
1883	5704629018839	White	Not dimmable