


Technical data

Amperage	350mA
System effect	2.3W
Light source	LED
Colour rendering	CRI>90
Expected lifespan	15,000 hours L70 B50
Dimmable, how	No
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<6
Beam angle	100°
Cut out dimension	Ø63 mm
Installation height	11 mm
Exterior dimensions	Ø68 mm
Operating temperature	-10° / +40°
Possibility of through wiring	No
IP rating	IP20
Insulation class	Class III
Material	Downlight: polycarbonat Mounting ring: aluminium
Environment	Indoors
Warranty	2 years with Nordtronic driver, item no. 98514021
Approvals	CE

Product information

- Low mounting depth – 11 mm
- High colour rendering index - CRI>90
- Flicker free according to the latest Ecodesign / ErP directive
- Incl. mounting ring
- Incl. 2.5 meter cable with plug

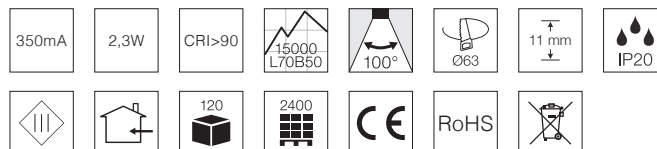

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.



Linea | 2700K | 160lm

Item no.	EAN no.	Design, colour
19111012	5704629000988	○ matt white
19111022	5704629000995	○ brushed alu

Linea | 3000K | 166lm

Item no.	EAN no.	Design, colour
19111013	5704629001008	○ matt white
19111023	5704629001015	○ brushed alu

Accessories

Item no.	EAN no.	Variant
98514021	5704629001060	LED Driver - not dimmable, 2.5-14W 350mA

