

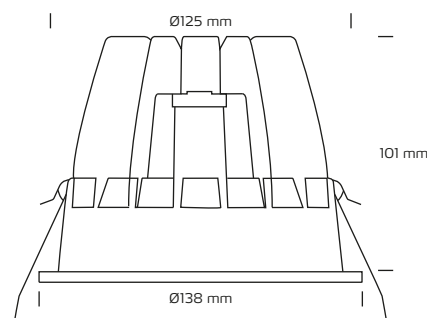


Zita 28W, 3000K

Technical data


Hole diameter:	Ø125 mm
Height:	101 mm
Front size:	Ø138 mm
Amperage / voltage:	700mA / 36V
System effect:	28W
Light source:	Integrated CITIZEN LED, 3000 Kelvin
Light intensity:	2000 Lumen
Colour rendering:	CRI>90
SDCM:	3
Beam angle:	50°
Dimmable:	Yes
IP-class:	IP20 / IP44 (is intended for installation in areas 1 and 2)
Insulation class:	Class III / II
Material:	Plastic, aluminium
Possibility of through wiring:	5-pole connector box for loop in and out with DALI / Push and mains
Colour code:	RAL 9003

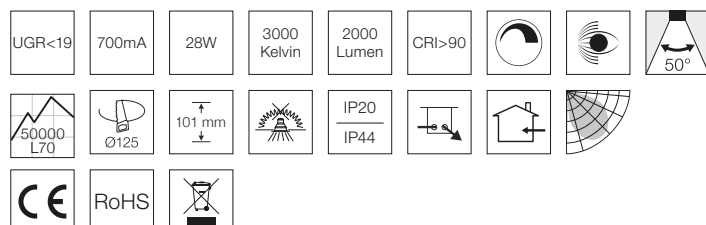

*The drawing is not drawn to scale

Product information

- UGR<19
- FlickerFree
- DALI / PUSH Cc driver
- Quick and easy mounting
- Mounting with springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Ceiling thickness for mounting is up to 30 mm

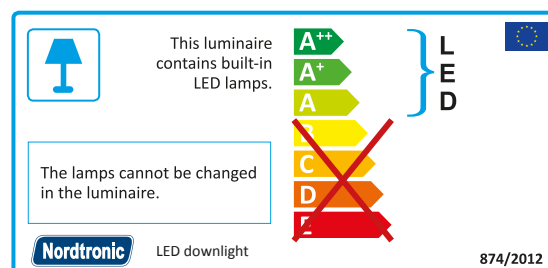

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
20112013	5704629000575	Matt white (RAL 9003)	Round