


Technical data


Voltage	220-240 VAC 50 Hz
System effect	6W
Colour rendering	CRI>90
Glare	UGR<19
Expected lifespan	50,000 timer
Dimmable, how	Yes, trailing edge
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	≤3
Beam angle	36°
Cut out dimension	Ø75 mm
Installation height	33 mm
Exterior dimensions	Ø88 mm
Dimensions driver	L: 110 mm, W: 46 mm, H: 25 mm
Tilt angle	40°
Operating temperature	-20° - 45°
Possibility of through wiring	Yes, 3G1.5 - 30 pcs.
IP rating	IP54 (is intended for installation in areas 1 and 2)
Insulation class	Class II
Material	Aluminium, polycarbonat
Environment	Indoors
Warranty	3 years
Approvals	CE

Product information

- Approved for installation directly in the insulation and flammable materials
- High colour rendering index - CRI>90
- High lumen output
- Glare free
- Flicker free according to the latest Ecodesign / ErP directive
- Mounting with springs
- Low mounting height
- Comes with removable driver, which makes it easy to connect the downlight for example after painting of the ceiling
- Quick and easy mounting
- Screwless terminal block in the connector box
- Ceiling thickness for mounting is up to 26 mm
- Swivel front - 120°

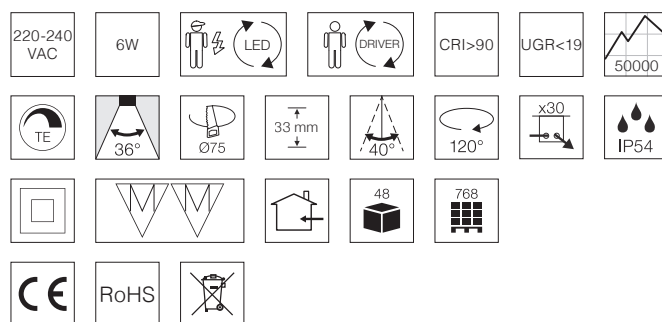

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

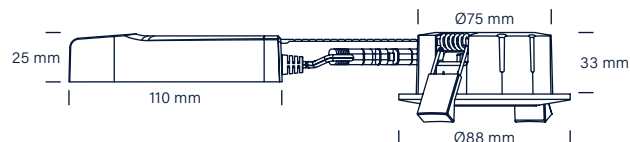

Low Profile ECO | 2700K | 450lm

Item no.	EAN no.	Design, colour	Light source
32111012	5704629001084	○ matt white (RAL 9016)	5W LED, item no 32000002
32111022	5704629001114	○ brushed alu	5W LED, item no 32000002
32111002	5704629001145	○ grey (RAL 9006)	5W LED, item no 32000002
32111092	5704629001176	○ matt black (RAL 9005)	5W LED, item no 32000002

Low Profile ECO | 3000K | 470lm

Item no.	EAN no.	Design, colour	Light source
32111013	5704629001091	○ matt white (RAL 9016)	5W LED, item no 32000002
32111023	5704629001121	○ brushed alu	5W LED, item no 32000002
32111003	5704629001152	○ grey (RAL 9006)	5W LED, item no 32000002
32111093	5704629001183	○ matt black (RAL 9005)	5W LED, item no 32000002

Low Profile ECO | 4000K | 510lm

Item no.	EAN no.	Design, colour	Light source
32111014	5704629001107	○ matt white (RAL 9016)	5W LED, item no. 32000004
32111024	5704629001138	○ brushed alu	5W LED, item no. 32000004
32111004	5704629001169	○ grey (RAL 9006)	5W LED, item no. 32000004
32111094	5704629001190	○ matt black (RAL 9005)	5W LED, item no. 32000004