


Gabriella 90° 4W, 4000K

Technical data


| | |
|-------------------------------|--|
| Amperage | 350mA |
| System effect | 4W |
| Light source | LED |
| Colour temperature | 4000 Kelvin |
| Light intensity | 282 Lumen |
| Colour rendering | CRI>90 |
| Expected lifespan | 50,000 hours L70 |
| Dimmable, how | Yes, trailing edge |
| Flicker free | Yes, according to the new Ecodesign / ErP directive (September 2021) |
| SVM <0.4 | Yes |
| PstLM <1 | Yes |
| SDCM | 3 |
| Beam angle | 90° |
| Carving dimensions | Ø55 mm |
| Installation height | 12 mm |
| Exterior dimensions | Ø70 mm |
| Possibility of through wiring | No |
| IP-class | IP44 (is intended for installation in areas 1 and 2) |
| Insulation class | Class III |
| Material | Aluminium |
| Environment | Indoors |
| Warranty | 2 years |
| Approvals | CE |

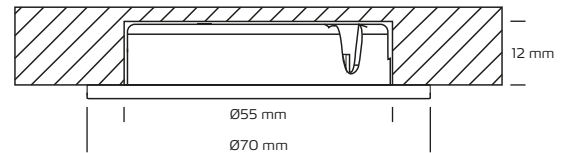

*The drawing is not drawn to scale

Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Large beam angle (90°)
- Dimmable with Nordtronic LED driver
- Incl. 3 meter cable with plug
- Designed and developed in Denmark

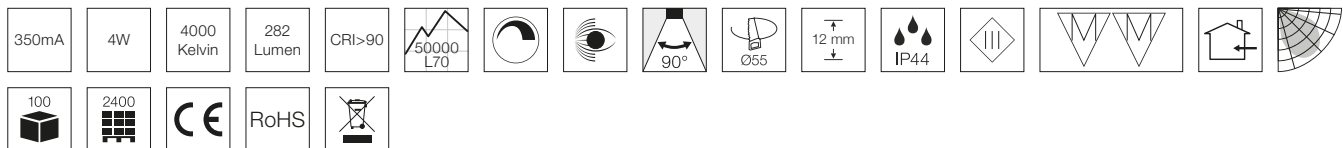

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

| Item no. | EAN no. | Colour | Front design |
|----------|---------------|-------------|--------------|
| 3433 | 5704629034334 | Matt white | Round |
| 3434 | 5704629034341 | Brushed alu | Round |

Accessories

| Item number | EAN no. | Variant |
|-------------|---------------|--------------------------------|
| 1872 | 5704629018723 | LED Driver dimmable, 5-16W |
| 1883 | 5704629018839 | LED Driver non dimmable, 2-20W |
| 1884 | 5704629018846 | LED Driver dimmable, 8-20W |
| 1875 | 5704629018754 | Extention cable 2 m |
| 3121 | 5704629031210 | Mounting ring matt white |
| 3122 | 5704629031227 | Mounting ring brushed alu |