




Technical data

| | |
|--|--|
| Voltage | 220-240 VAC 50/60 Hz |
| System effect | 7.5W, 12W, 18W, 24W |
| Light source | LED D |
| Colour temperature | 3000 / 4000 Kelvin CCT switch |
| Colour rendering | CRI>90 |
| Expected lifespan | 50,000 hours L80B10 |
| Dimmable, how | Yes, trailing edge |
| Flicker free | Yes, according to the latest Ecodesign / ErP directive |
| SVM <0.4 | Yes |
| PstLM <1 | Yes |
| Beam angle | 110° |
| Cut out | Ø105 mm, Ø155-160 mm, Ø205-210 mm, Ø285 mm |
| Installation height / headroom above ceiling | 22 mm / 26 mm |
| Exterior dimension | Ø120 mm, Ø170 mm, Ø224 mm, Ø300 mm |
| Dimension driver | 7.5W: L: 71 mm, B: 44,5 mm, H: 26 mm 12W og 18W: L: 82 mm, B: 44,5 mm, H: 26 mm 24W: L: 95 mm, B: 46 mm, H: 34 mm |
| Dimension connector box | L: 62.5 mm, W: 44 mm, H: 26 mm |
| Possibility of through wiring | Yes, 2 x 3G1.5 mm ² |
| IP rating, front / back | IP44 / IP20 |
| Insulation class | Class II |
| Material | Aluminium, plastic |
| Environment | Indoor and outdoor |
| Warranty | 5 years |
| Approvals | CE |

Product information

- Approved for installation directly in insulation and flammable materials
- Dimmable
- High colour rendering index – CRI>90
- High lumen output
- Flicker free according to the latest Ecodesign / ErP directive
- CCT switch 3000K / 4000K
- 3-pole levers in the connector box
- Quick and easy mounting with springs
- For indoor and outdoor use

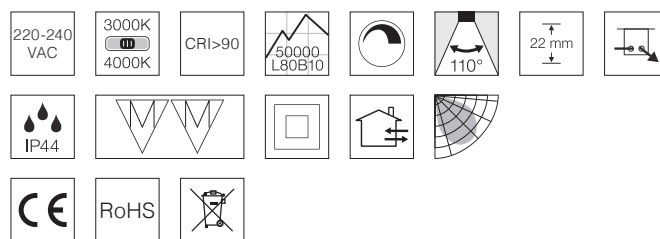

Lucette G2 7.5W



Lucette G2 12W






Lucette G2 18W



Lucette G2 24W



NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

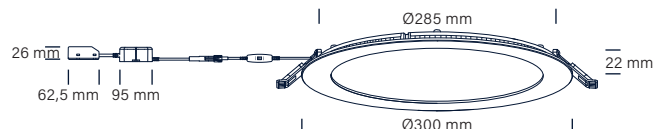

Lucette G2

| Item no. | EAN no. | System effect | Type | Cut out | Exterior dimension | Colour |
|----------|---------------|---------------|------------------------------|-------------|--------------------|-----------------------|
| 38101013 | 5704629004931 | 7.5W | 3000 / 4000K 500 / 550lm | Ø105 mm | Ø120 mm | matt white (RAL 9010) |
| 38201013 | 5704629004948 | 12W | 3000 / 4000K 1000 / 1100lm | Ø155-160 mm | Ø170 mm | matt white (RAL 9010) |
| 38301013 | 5704629004955 | 18W | 3000 / 4000K 1500 / 1600lm | Ø205-210 mm | Ø224 mm | matt white (RAL 9010) |
| 38401013 | 5704629004962 | 24W | 3000 / 4000K 2000 / 2100lm | Ø285 mm | Ø300 mm | matt white (RAL 9010) |