


Technical data

Voltage	200-240 VAC 50/60 Hz
System effect	18W
Light source	15W LED, item no. 51202011 15W LED, item no. 51202091 F
Colour temperature	3000 / 4000 Kelvin CCT switch
Light intensity	1550 / 1650 Lumen
Colour rendering	CRI>90
Expected lifespan	50,000 hours L90B50
Dimmable	Yes, trailing edge
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	One single LED <3
Beam angle	120°
Exterior dimensions	Ø275 mm, D: 71 mm
Operating temperature	-20° - 45°
Possibility of through wiring	Yes, 2 x 5G1,5 mm ²
IP rating	IP54
IK rating	IK08
Insulation class	Class II
Material	UV-resistant polycarbonat and polypropylene
Environment	Indoors and outdoors
Warranty, product / surface	5 years / 2 years
Approvals	CE

Product information

- High lumen output
- Flicker free according to the latest Ecodesign / ErP directive
- CCT switch 3000K / 4000K
- High colour rendering index - CRI>90
- Dimmable - trailing edge

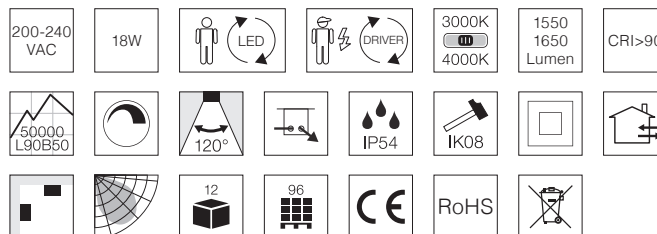

Item no.	EAN no.	Design, colour	Type
51212011	5704629001237	○ matt white (RAL 9016)	standard
51212091	5704629001268	○ matt black (RAL 9005)	standard

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.