


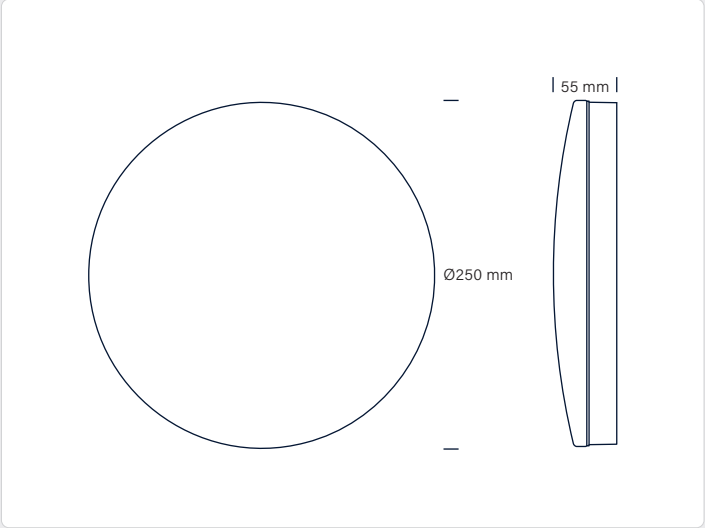

Technical data

Voltage	220-240 VAC 50 Hz
System effect	12W
Light source	LED, item no. 51402001 D
Colour temperature	3000 / 4000 / 5000 Kelvin CCT switch
Light intensity	900 / 1050 / 1000 Lumen
Colour rendering	CRI>80
Expected lifespan	30,000 hours
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<6
Beam angle	100°
Exterior dimension	Ø250 mm, D: 55 mm
Operating temperature	-20° - +45°
IP rating	IP54
IK rating	IK03
Insulation class	Class II
Material	Plastic
Environment	Indoor
Sensor, detection area	1-4 m
Sensor, hold time	30 sek / 3 min / 5 min / 10 min
Daylight sensor	<10 / <30 / <50 Lux
Warranty	3 years
Approvals	CE

Product information

- CCT switch 3000K / 4000K / 5000K
- IP54
- Built-in sensor
- Flicker free according to the latest Ecodesign / ErP directive

200-240 VAC

12W

LED

DRIVER

3000K
4000K
5000K

900 / 1050 / 1000 Lumen

CRI>80

30000

100°

IP54

Sensor

1-4 m

12

192

RoHS

Item no.	EAN no.	Colour	Environment
51421111	5704629006126	matt white	Indoor

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.