
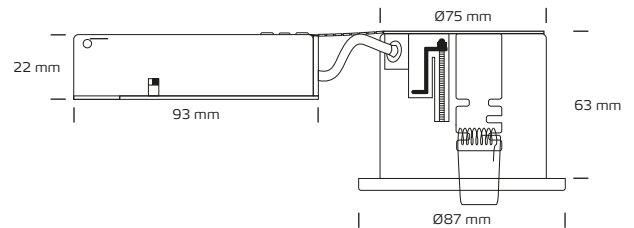
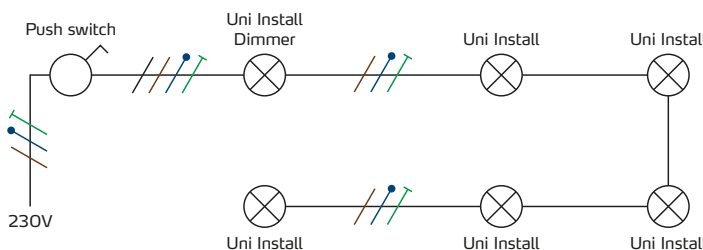


# Uni Install Dimmer 5.5W outdoor, 4000K

## Technical data

Voltage	220-240 VAC 50 Hz
System effect	Max. 7.5W LED
Light source	5.5W LED
Colour temperature	4000 Kelvin
Light intensity	420 Lumen
Colour rendering	CRI>90
Expected lifespan	15,000 hours
Dimmable	Yes, trailing edge
Flicker free	Yes, according to the new Ecodesign / ErP directive (September 2021)
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<4
Beam angle	38°
Carving dimensions	Ø75 mm
Installation height	63 mm
Exterior dimensions	Ø87 mm / 87 x 87 mm
Dimensions driver	L: 93 mm, W: 45 mm, H: 22 mm
Tilt angle	30°
Possibility of through wiring	Yes, 3G1.5
IP-class	IP44
Insulation class	Class II
Material	Plastic, acid resistant stainless steel AISI 316
Environment	Outdoors
Warranty	5 years
Approvals	CE

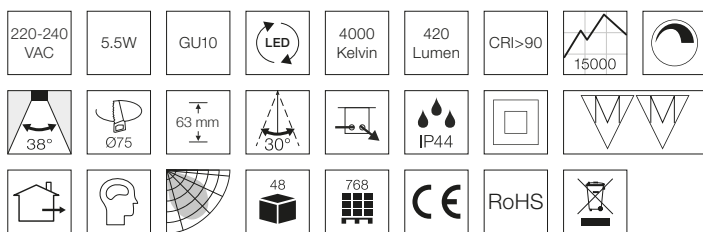

\*The drawing is not drawn to scale

## Product information

- Approved for installation directly in the insulation and flammable materials
- Low mounting depth
- Built-in LED dimmer (trailing edge)
- Max. load dimmer: 120W
- Adjustable min. setting for dimming
- Memory function for dimming
- Quick and easy mounting
- Mounting with screws or adjustable springs
- Screwless terminal block in the connector box
- Possibility of mounting with cable or 16 mm flex tube
- Adjustable springs for ceiling thickness up to 44 mm
- Adjustable screws for ceiling thickness up to 35 mm
- Designed and developed in Denmark

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Front design
70431054	5704629001947	White	Round
70431084	5704629001978	Brushed steel	Round
70431114	5704629002005	Black	Round