
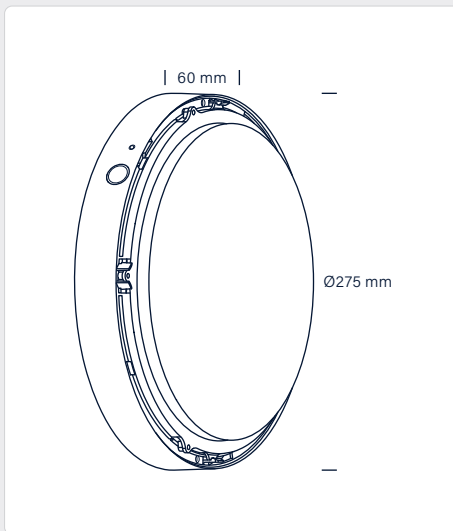


Technical data

Voltage	200-240 VAC 50/60 Hz
System effect	12W
Light source	10W LED, item no. 96000023 F
Colour temperature	3000 / 4000 Kelvin CCT switch
Light intensity, round cover	850 / 900 Lumen
Light intensity, eyelid cover	550 / 580 Lumen
Colour rendering	CRI>90
Expected lifespan	50,000 hours
Dimmable, how	No
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	One single LED <3
Beam angle	120°
Exterior dimensions	Ø275 mm, D: 60 mm
Possibility of through wiring	Ja, 2 x 3G1,5 mm²
IP rating	IP65
IK rating	IK10
Insulation class	Class II
Material	Polycarbonate
Environment	Indoors and outdoors
Sensor, detection angle	140°
Sensor, detection area	4-6 m
Sensor, hold time	5 sec / 1 min / 3 min / 10 min
Daylight sensor	30 Lux / disable
Stand-by dim level	Off / 20%
Stand-by dim level period	On / 15 min
Recommended mounting height, wall	1.8 m
Recommended mounting height, ceiling	3 m
Warranty, product / surface	5 years / 2 years
Approvals	CE

Product information

- Flicker free according to the latest Ecodesign / ErP directive
- CCT switch 3000K / 4000K
- High colour rendering index – CRI>90
- Built-in stand-by dim function

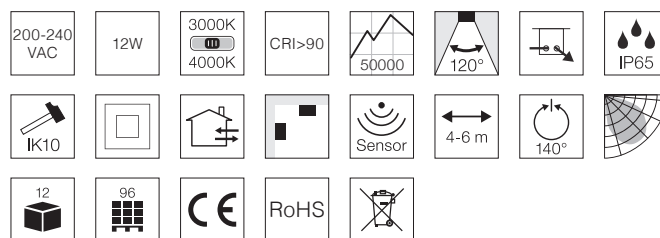

Item no.	EAN no.	Design, colour	Type
96103091	5704629002128	○ matt black (RAL 9005)	standard

Cover

Item no.	EAN no.	Type, design	Colour
96119099	5704629002135	cover, round	matt black (RAL 9005)
96129099	5704629002142	cover, eyelid	matt black (RAL 9005)

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.