


Technical data

Voltage	220-240 VAC 50/60 Hz
System effect	3W
Light source	LED
Colour temperature	6000 Kelvin
Light intensity	40-60 Lumen
Colour rendering	CRI>80
Beam angle	120°
Exterior dimension	L: 310 mm, W: 35 mm, H: 230 mm
Tilt angle	90°
Operating temperature	0° - +55°
Reading distance	Max. 24 m
Battery	3.2V 1800mAh LiFePO4
Auto test	Yes
Manual test button	Yes
IP rating	IP20
Insulation class	Class II
Material	Polycarbonate, metal
Environment	Indoor
Warranty	2 years
Approvals	CE

Product information

- Can be mounted directly on the wall and ceiling
- In case of power failure, the built-in battery pack provides approx. 3 hours of emergency operation
- Reading distance: Max. 24 m
- Incl. 3 x 2 pictograms
- Test the lighting and the battery periodically
- It is recommended to replace the battery every 4 years
- Conform to BS EN 605598-2-22

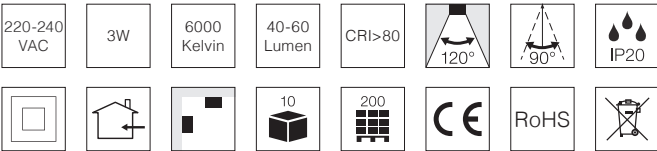

Item no.	EAN no.	Colour
97121116	5704629006669	white



NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.