


Technical data




Voltage	220-240 VAC 50/60 Hz
System effect	5.5W
Cos Phi / Power factor	0.8
Light source	LED
Colour rendering	CRI>90
Expected lifespan	25,000 hours
Dimmable	Yes
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<4
Beam angle	38°
Height	54 mm
Exterior dimensions	Ø50 mm
IP rating, front / back	IP44 / IP20
Material	Aluminium, plastic
Environment	Indoors and outdoors
Warranty	2 years
Approvals	CE

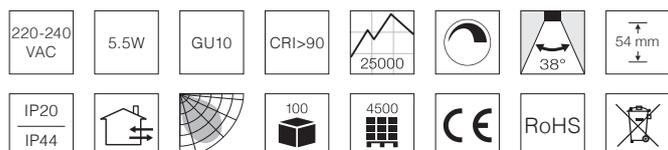

Product information

- Flicker free according to the latest Ecodesign / ErP directive
- High colour rendering index CRI>90
- High lumen output
- Low minimum setting on dimming range*
*The lowest setting is tested down to 5% on Nordtronic's Box Dimmer Dali item no. 98415031, Box Dimmer Zigbee item no. 98425031 and Box Dimmer Triac item no. 98445031

Item no.	EAN no.	Kelvin	Lumen	
98111052	5704629000339	2700K	350lm	G
98111053	5704629000346	3000K	400lm	G
98111054	5704629000353	4000K	420lm	G

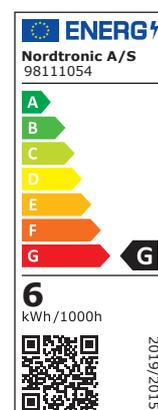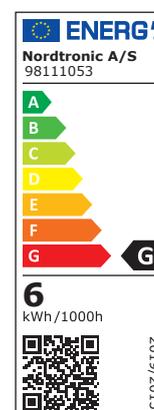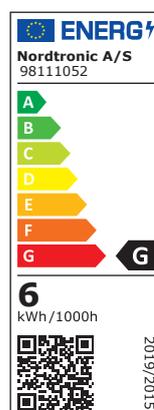

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.