


Technical data


Amperage	Cc500mA
System effect	5W
Light source	LED <span>F</span>
Colour rendering	CRI>95
Expected lifespan	50,000 hours L70 B50
Dimmable, how	Yes, trailing edge
Flicker free	Yes, according to the latest Ecodesign / ErP directive
SVM <0.4	Yes
PstLM <1	Yes
SDCM	<3
Beam angle	36°
Height	30 mm
Exterior dimension	Ø87 mm
Tilt angle	45°
Operating temperature	-20° - +45°
Storage temperature	-40° - +80°
IP rating, front / back	IP44 / IP20
Insulation class	Class III
Material	Aluminium, plastic
Approvals	CE

Product information

- The front / light source is specially designed for Nordtronic's Low Profile Flexible G2 Large Tilt Ø75

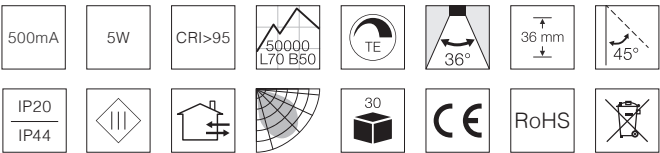

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

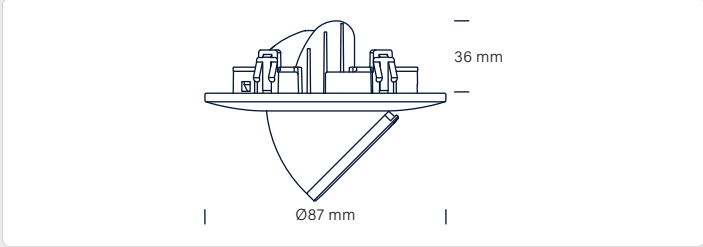

Item no.	EAN no.	Design, colour	Type	Environment	Warranty, product / surface
98373012	5704629004306	○ matt white (RAL 9010)	2700K   400lm	indoor and outdoor	7 years / 10 years
98373022	5704629004320	○ brushed alu	2700K   400lm	indoor	7 years
98373013	5704629004313	○ matt white (RAL 9010)	3000K   420lm	indoor and outdoor	7 years / 10 years
98373023	5704629004337	○ brushed alu	3000K   420lm	indoor	7 years