

Dali 4 ch Input Module 230V


Technical data

Supply	Via DALI-line
Consumption	2.6 mA
Function	4x switching input 230V
Connecting wire cross section	0.5-1.5 mm ²
Exterior dimensions	L: 58.5 mm, W: 32.5 mm, H: 15 mm
IP-class	IP20
Material	Plastic
Warranty	2 years
Approvals	CE



Product information

- DALI control module with 4 switching inputs for mains voltage 230V
- Galvanic isolation between switching input and DALI-line
- The function of each switching input can be configured individually
- Destination address, switching mode and DALI-command can be assigned to each pushbutton
- Various switching modes (short, long press; toggle; etc.) can be assigned to each pushbutton
- The following functions are available: up, down, off, recall min/ max, goto scene 0-15, direct arc power in % as well as macros
- Memory function
- Multi-master capability, several modules can be installed on the same DALI-line

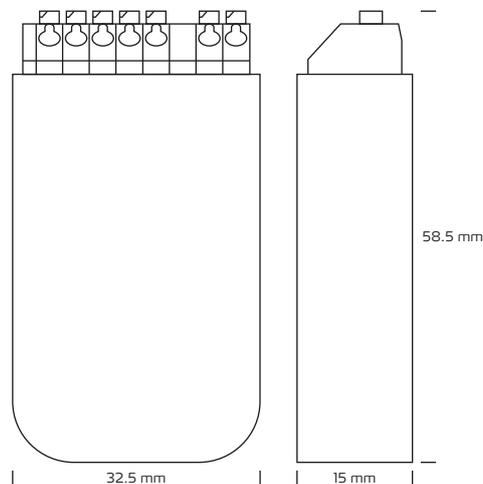

*The drawing is not drawn to scale

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Type
98411040	5704629000360	4 ch Input Mudule 230V