


## Technical data

<b>Voltage</b>	100-240Vac
<b>Output current</b>	1.1A
<b>Max. dimmer load</b>	150W LED
<b>Dimming</b>	Trailing edge
<b>Exterior dimension</b>	L: 44 mm, W: 46.8 mm, D: 37 mm
<b>IP rating</b>	IP20
<b>Material</b>	Plastic
<b>Environment</b>	Indoor
<b>Warranty</b>	5 years
<b>Approvals</b>	CE

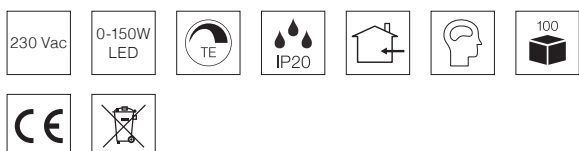

## Product information

- Trailing edge dimmer: 5-150W
- Input and Output with screw terminals, safe and reliable
- Enables to set and delete a minimum dimming level
- Can be controlled by universal 230Vac input single wire push switch
- Fits in 1M Danish system
- Memory function for dimming

## Rotary Dimmer Triac

Item no.	EAN no.	Environment
98445072	5704629005846	Indoor

## Rotary Dimmer covers

Item no.	EAN no.	Colour
98823218	5704629005853	matt white
98823228	5704629005860	matt grey
98823298	5704629005877	matt black

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.