


Technical data

Primary voltage	200-240 VAC 50/60 Hz
Min. load	3W
Max. load	6W
Output current	6-12 Vdc (depending on load)
Output voltage	500mA (Cc)
Expected lifespan	50,000 hours
Dimmable	Yes, trailing edge
Dimension driver	L: 94 mm, W: 44 mm, H: 23 mm
Possibility of through wiring	Yes, 2 x 3G1,5 mm ²
Operating temperature	-20° - +45°
IP rating	IP21
Insulation class	Class II
Material	Plastic
Environment	Indoor and outdoor
Warranty, product / surface	7 years
Approvals	CE, RoHS

Product information

- Approved for installation directly in the insulation and flammable materials
- For indoor and outdoor use
- Dimmable - trailing edge
- Built-in thermofuse with auto reset
- Quick and easy installation
- Can be fastened by screws
- 3-pole leavers in the connector box
- Approved for through wiring – 2 x 3G1.5 mm²
- Possibility of mounting with cable or 16 mm flex tube
- 7 years warranty
- Do NOT plug in any LED lamps, when connected to power**

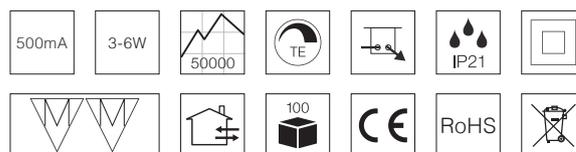

Item no.	EAN no.	Type
98544010	5704629004351	6W driver for Low Profile Flexible G2

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.