

Technical data


Primary voltage	220-240VAC 50/60 Hz
Secondary amperage	350 / 500mA
Min. load	3.5 / 5W
Max. load	10.5 / 15W
Efficiency	+79%
Vout range	10-30 Vdc
Dimmable	Yes, leading or trailing edge
Fuse	Built-in thermal fuse with auto reset
Distribution box on secondary side	Yes, with 6 outputs
Cable from the secondary side	Yes, 11.9 cm to distribution box
Connection cable on primary side	Yes, 1.96 m cable equipped with 2P plug
Possibility of attachment	Yes, using screws (not included)
Dimensions driver	L: 116 mm, W: 41 mm, H: 25 mm
Dimensions distribution box	L: 59 mm, W: 38 mm, H: 11 mm
Ambient temperature range ta	-25° - +45°
Storage temperature range	-20° - +70°
Mains switching cycles	>100,000
Leakage current	0.50mA
IP rating	IP20
Insulation class	Class II
Material	Plastic
Environment	Indoor
Warranty	5 years
Approvals	CE

DIP Switch settings

Volt	mA	Watt
10 - 30V	350mA	3.5 - 10.5W
10 - 30V	500mA	5 - 15W

Product information

- LED driver for cabinet lighting and mini downlights (350mA, 6 outputs)
- Dimmable – leading or trailing edge
- DIP switch enables 350mA or 500mA
- Built-in thermofuse with auto reset
- Quick and easy installation
- Can be fastened by screws
- Do NOT plug in any LED lamps, when connected to power**

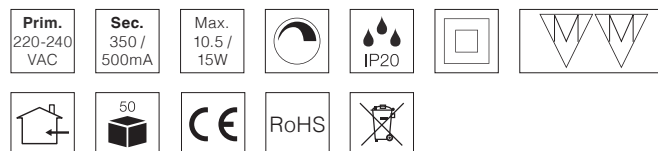

Item no.	EAN no.	Type
98544016	5704629004979	dimmable

Max. LED driver per circuit breaker

Circuit breaker	B10	B13	B16	C10	C13	C16
Max. number	83	108	133	83	108	133

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.