




Technical data

Primary Voltage	220-240VAC
Secondary amperage	850mA +/-5%
Min. load	23W
Max. load	45W
Efficiency	+88%
Leakage current	
Fuse	Indbygget termosikring med autoreset
Expected lifespan	50,000 hours
Dimmable	Yes, leading and trailing edge
Cable with plug from secondary side	Yes, 11.9 cm
Connection cable on primary side	3-pole connector box for loop in and out
Dimensions driver	L: 166 mm, W: 52 mm, H: 24 mm
Dimensions connector box	L: 78 mm, W: 42 mm, H: 26 mm
Possibility of through wiring	Yes, 2 x 3G2.5 mm ²
Operating temperature	-20° - +45°
IP rating	IP20
Insulation class	Class II
Material	Aluminium, plastic
Environment	Indoors
Warranty	5 years
Approvals	CE EN 61347-2-13 EN 55015 EN 61000-3-2 Class C EN 61547

Product information

- Possibility for loop in and out
- Built-in thermofuse with auto reset
- Quick and easy installation
- Dimmable - leading and trailing edge
- **Do NOT plug in any LED lamps, when connected to power**
- Fits ECotech Panel 60 x 60 UGR<19, item no. 38610034

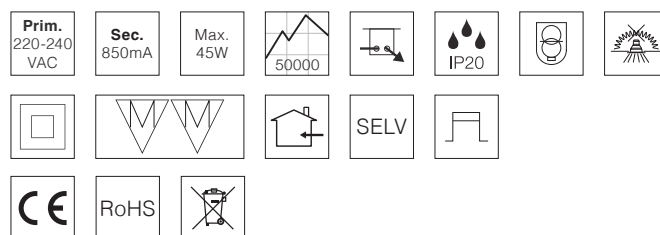

Item no.	EAN no.	Type
98544883	5704629006331	Triac Dim

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.