


## Velia PRO Driver - dimmable 9-13W



### Technical data


Primary voltage	220-240 VAC 50/60 Hz
Secondary voltage	25-38 Vdc
Secondary amperage	350mA
Min. load	9W
Max. load	13W
Efficiency	0,83
Expected lifespan	50.000 hours L90 B10 100.000 hours L70 B50
Dimmable	Yes, trailing edge
Dimensions driver	L: 95 mm, W: 45 mm, H: 30 mm
Dimensions connector box	L: 85 mm, W: 55 mm, H: 30 mm
Possibility of through wiring	Yes, 2 x 3G1,5
Ambient temperature	-20° - +50°
Storage temperature	-20° - +70°
Switching cycles	>25.000
IP-class	IP20
Insulation class	Class II
Fuse	Built-in thermal fuse with auto reset
Environment	Indoor
Material	Plastic
Warranty	5 years
Approvals	CE, SELV



\*The drawing is not drawn to scale

### Produktinformation

- Built-in thermal fuse with auto reset
- Quick and easy installation
- May only be used with  
Velia PRO Tilt DtW item no. 30112017, 30112097  
Velia PRO Large Tilt DtW item no. 30132017

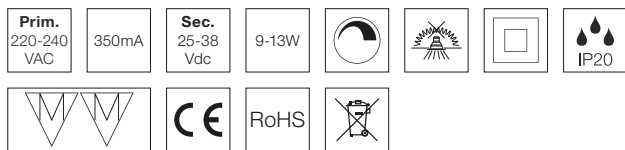

### Max. LED driver per circuit breaker

Circuit breaker	R9F12616 (16A)	M9F14213 (13A)	R9F12610 (10A)
Max. number	25	25	25

NB: Always use cables of a type approved for permanent installation according to the current legislation. If the cables are in contact with the lamp cover, use cables with an operating temperature of at least 70° C.

Item no.	EAN no.	Colour	Type
98554023	5704629002500	White	Dimmable driver for Velia PRO